



SELECTION CHART

- TYPE: FS (ø50~ø200)

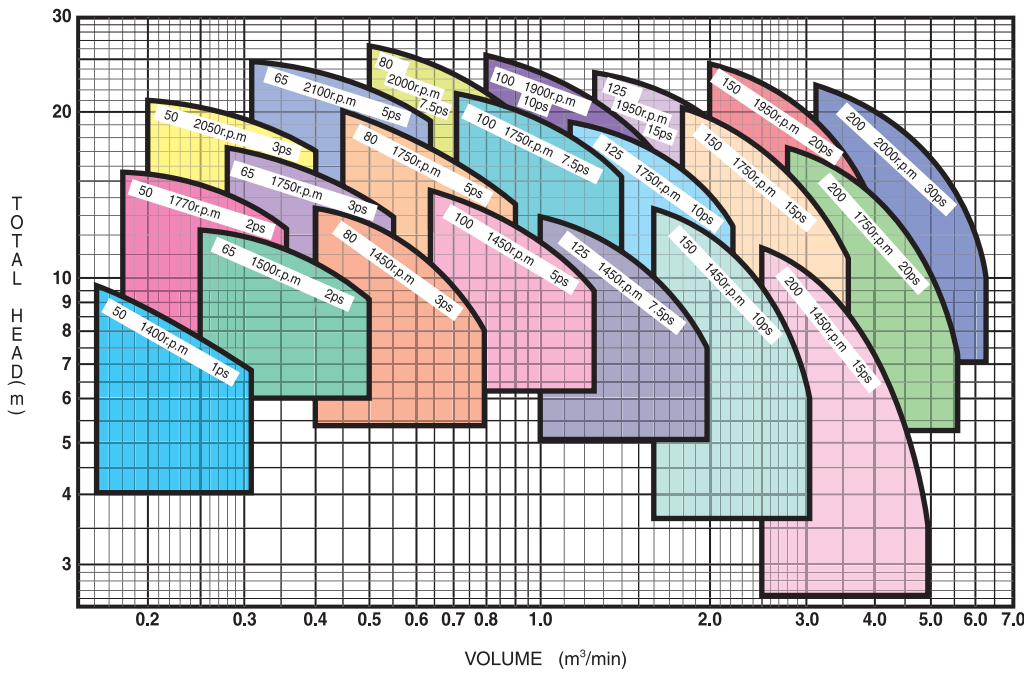

COMPARATIVE TABLE

1m	3.281 feet
	1.421 psi
1 ℓ /min	0.2199 IMP gal/min
(1m³=1000 ℓ)	0.2642 U.S gal/min

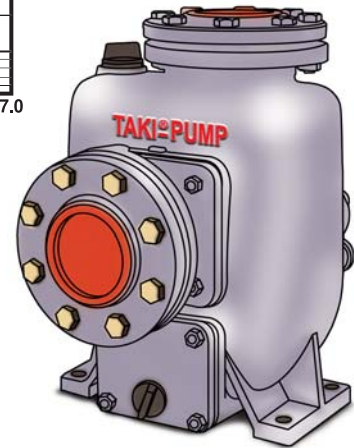

SELECTION TABLE

- TYPE: FS (ø50~ø200)

BORE mm	MODEL	BORE inch	rpm	POWER		SPECIFICATIONS					
				PS	KW	Volume	Total head	Volume	Total head	Volume	Total head
						m³/min	m	m³/min	m	m³/min	m
50	FS - 50	2	1400	1	0.75	0.16	9.5	0.22	8.8	0.32	6.8
			1770	2	1.5	0.18	15.8	0.25	14.8	0.36	12.2
			2050	3	2.2	0.2	21	0.28	19.8	0.4	17
65	FS - 65	2½	1500	2	1.5	0.25	12.2	0.36	11.2	0.5	9.2
			1750	3	2.2	0.28	17.2	0.4	15.5	0.56	12.8
			2100	5	3.7	0.32	24.8	0.45	23	0.63	19.8
80	FS - 80	3	1450	3	2.2	0.4	13.2	0.56	12	0.8	8
			1750	5	3.7	0.45	20	0.63	18.2	0.9	13.8
			2000	7.5	5.5	0.5	26	0.71	23.5	1	18
100	FS - 100	4	1450	5	3.7	0.63	14.2	0.9	12.5	1.25	9.5
			1750	7.5	5.5	0.71	21.5	1	19.5	1.4	15.5
			1900	10	7.5	0.8	25.2	1.12	22.5	1.6	17
125	FS - 125	5	1450	7.5	5.5	1	12.8	1.4	11.2	2	7.5
			1750	10	7.5	1.12	19	1.6	17	2.24	12.5
			1950	15	11	1.25	23.5	1.8	21	2.5	15.5
150	FS - 150	6	1450	10	7.5	1.6	13.2	2.24	11	3.15	5.8
			1750	15	11	1.8	20.2	2.5	17.2	3.55	10.8
			1950	20	15	2	24.2	2.8	21.2	4	12.5
200	FS - 200	8	1450	15	11	2.5	11.2	3.5	8.8	5	3.5
			1750	20	15	2.8	17	4	14	5.6	7.2
			2000	30	22	3.15	22.2	4.5	18.5	6.3	10