





DIMENSIONS

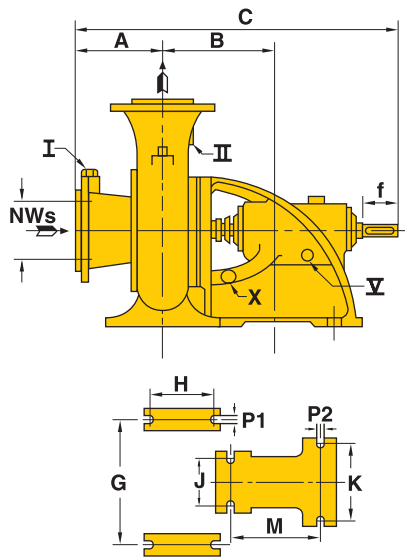

L-60, L-80




L-100, L-120, L-150





L-120, L-150

type 200-23, 250-29, 300-35 only



Dimensions in mm.

Bearing Housing	Pump Model	Bore		Pump												Shaft end				Connections								
		NWs	NWd	A	B	C	D	E	E1	F	G	H	J	K	M	P1	P2	dm6	f	g	h	I	II	III	IV	V	X	
L-60	40-20	50	40	110	223	560	200	160					140	140	220		20	24	65	8	26.9							
	40-26	50	50	110	223	560	225	160					140	140	220		20	24	65	8	26.9							
	40-33/2	50	50	175	223	625	225	160					140	140	220		20	28	65	8	30.9							
	50-20	65	50	110	223	560	225	160					140	140	220		20	24	65	8	26.9							
	50-26	65	50	110	223	560	250	160					140	140	220		20	24	65	8	26.9	PF	PF	PF	PF	PF	PF	
	50-33/2	65	50	175	223	625	250	160					140	140	220		20	28	65	8	30.9	PF	PF	PF	PF	PF	PF	
	65-20	80	65	125	228	580	225	160					140	140	220		20	24	65	8	26.9							
	65-26	80	65	125	228	580	250	160					140	140	220		20	24	65	8	26.9							
	65-33/2	80	65	175	228	630	250	160					140	140	220		20	28	65	8	30.9							
80-20	100	80	125	228	580	250	160					140	140	220		20	24	65	8	26.9								
L-80	80-26	100	80	125	270	660	300	200					175	175	300		25	28	65	8	30.9							
	80-33	100	80	125	270	660	350	200					175	175	300		25	28	65	8	30.9							
	80-40/2	100	80	210	270	745	350	200					175	175	300		25	38	65	8	40.9							
	100-20	125	100	155	275	695	275	200					175	175	300		25	28	65	8	30.9	PF	PF	PF	PF	PF	PF	
	100-26	125	100	120	275	660	300	200					175	175	300		25	28	65	8	30.9	PF	PF	PF	PF	PF	PF	
	100-33	125	100	155	275	695	375	200					175	175	300		25	28	65	8	30.9	PF	PF	PF	PF	PF	PF	
	125-20	150	125	150	280	695	300	200					175	175	300		25	28	65	8	30.9							
125-26	150	125	150	280	695	350	200					175	175	300		25	28	65	8	30.9								
L-100	100-40	125	100	155	335	840	400	250	300				430	190	195	195	375	22	25	42	105	12	45.1					
	100-50/2	125	100	230	335	915	400	250	300				430	190	195	195	375	22	25	42	105	12	45.1	PF	PF	PF	PF	PF
	125-33	150	125	150	340	840	375	250	300				430	190	195	195	375	22	25	42	105	12	45.1	PF	PF	PF	PF	PF
150-26	200	150	170	340	860	400	250	300				430	190	195	195	375	22	25	42	105	12	45.1						
L-120	125-40	150	125	160	365	930	475	300	300				430	190	125	215	430	22	25	42	105	12	45.1					
	125-50/2	150	125	247	365	1017	475	300	300				430	190	125	215	430	22	25	42	105	12	45.1	PF	PF	PF	PF	PF
	150-33	200	150	170	370	945	425	300	300				430	190	125	215	430	22	25	42	105	12	45.1	PF	PF	PF	PF	PF
200-23	200	200	250	366	1021	300	300	330	244			430	190	125	215	430	22	25	42	105	12	45.1						
L-150	150-40	200	150	160	490	1155	425	400	400				560	190	150	320	540	30	30	55	135	16	58.8					
	150-50	200	150	170	490	1165	525	400	400				560	190	150	320	540	30	30	55	135	16	58.8					
	200-33	250	200	175	495	1175	475	400	400				560	190	150	320	540	30	30	55	135	16	58.8					
	200-40	250	200	180	500	1185	525	400	400				560	190	150	320	540	30	30	55	135	16	58.8					
	200-50	250	200	180	500	1180	575	400	450				670	210	150	320	540	30	30	55	135	16	58.8	PF	PF	PF	PF	PF
	250-29	250	250	220	500	1225	350	400	400	292			660	190	150	320	540	30	30	55	135	16	58.8	PF	PF	PF	PF	PF
	250-33	300	250	245	473	1223	525	400	400				560	190	150	320	540	30	30	55	135	16	58.8					
	250-40	300	250	180	495	1180	600	400	400				650	210	150	320	540	30	30	55	135	16	58.8					
	250-50	300	250	215	495	1215	650	450	450	250			660	210	150	320	540	30	30	55	135	16	58.8					
	300-35	300	300	300	510	1315	450	400	520	352			670	275	150	320	540	30	30	55	135	16	58.8					



Flange

JIS 10 kg/cm² RF

Bore.a	b	c	d	ø	k	m	n	Bolt
40	85	105	140	19	2	20	4	M16
50	100	120	155	19	2	20	4	M16
65	120	140	175	19	2	22	4	M16
80	130	150	185	19	2	22	8	M16
100	155	175	210	19	2	24	8	M16
125	185	210	250	23	2	24	8	M20
150	215	240	280	23	2	26	8	M20
200	265	290	330	23	2	26	12	M20
250	325	355	400	25	2	30	12	M22
300	370	400	445	25	2	32	16	M22